


Zachary C. Gillihan 2008

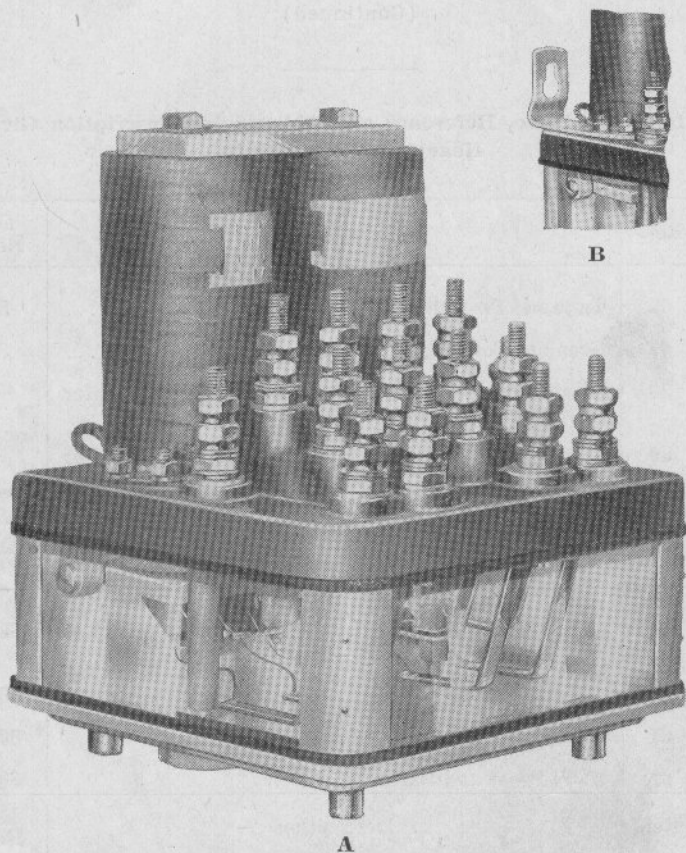

**STYLE DN-11 D. C. NEUTRAL RELAY
(FOUR-POINT)**

Unless otherwise specified Relays will be furnished with silver to graphite front and silver to silver back contacts. (Low voltage contacts).

If high voltage contacts, or relays with slow or quick release are required, orders should so specify.

Shock absorber springs are not furnished unless called for. (See Plates E-4950 and E-5030).

The maximum contact combination is four front and four back non-independent contacts.