


Memorandum

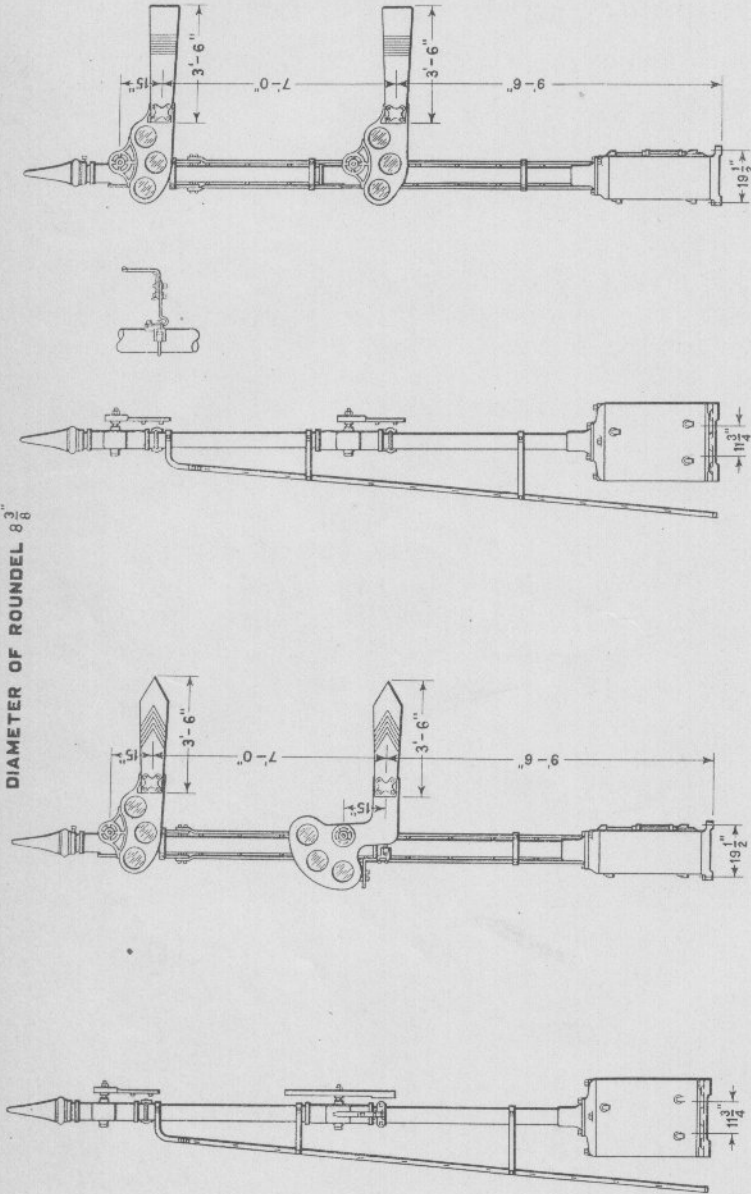

DIAMETER OF ROUND EL 8 3/8

- D - WITH 8 VOLT MECHANISM
- E - WITH 10 VOLT MECHANISM
- F - WITH 20 VOLT MECHANISM

- A - WITH 8 VOLT MECHANISM
- B - WITH 10 VOLT MECHANISM
- C - WITH 20 VOLT MECHANISM

Two Arm Upper Quadrant Bracket or Bridge Signals

Two Arm
Upper Quadrant Bracket or Bridge Signals
Model 2A Base of Mast Mechanism

Unless otherwise specified, signals will be furnished as illustrated on opposite page. Lamps and number plates are not included. If signals other than those shown are desired, specify height to center of blades and give reference numbers to spectacle and blade; also state number and color of roundels. See Part 18 of this Section for spectacles, blades and roundels, and Part 17 for masts, ladders, bearings, etc. See Plate H0301 for dolls.

Circuit controllers are equipped with the contacts necessary for the local control of the signal only. If pole changing contacts or extra drag contacts are required, same must be specified. State the positions of the signal blade at which each extra contact is to make and break, considering the stop position as 0 degree.

Drawing references are shown for convenience in checking shipping lists and invoices.

Fig. No.	Name	Drawing Reference
Order by plate, figure number and name		
A	Two Arm Staggered Light Upper Quadrant Model 2A Bracket or Bridge Signals, with 8 volt Mechanism and Case, complete as shown. For details and specifications of Signal Mechanism see Plate H1103.	
A1	as above, except without Roundels.	
A2	same as Fig. A, except one Arm operative and one Arm fixed. Specify Arm and position of Arm to be fixed.	
A3	same as Fig. A2, except without Roundels.	
B	same as Fig. A, except with 10 volt Mechanism.	
B1	as above, except without Roundels.	
B2	same as Fig. B, except one Arm operative and one Arm fixed. Specify Arm and position of Arm to be fixed.	
B3	same as Fig. B2, except without Roundels.	
C	same as Fig. A, except with 20 volt Mechanism.	
C1	as above, except without Roundels.	
C2	same as Fig. C, except one Arm operative and one Arm fixed. Specify Arm and position of Arm to be fixed.	
C3	same as Fig. C2, except without Roundels.	

Two Arm
Upper Quadrant Bracket or Bridge Signals
Model 2A Base of Mast Mechanism

Drawing references are shown for convenience in checking shipping lists and invoices.

Fig. No.	Name	Drawing Reference
Order by plate, figure number and name		
D	Two Arm Vertical Light Upper Quadrant Model 2A Bracket or Bridge Signal, with 8 volt Mechanism and Case, complete as shown. For details and specifications of Signal Mechanism see Plate H1103.	
D1	as above, except without Roundels.	
D2	same as Fig. D, except one Arm operative and one Arm fixed. Specify Arm and position of Arm to be fixed.	
D3	same as Fig. D2, except without Roundels.	
E	same as Fig. D, except with 10 volt Mechanism.	
E1	as above, except without Roundels.	
E2	same as Fig. E, except one Arm operative and one Arm fixed. Specify Arm and position of Arm to be fixed.	
E3	same as Fig. E2, except without Roundels.	
F	same as Fig. D, except with 20 volt Mechanism.	
F1	as above, except without Roundels.	
F2	same as Fig. F, except one Arm operative and one Arm fixed. Specify Arm and position of Arm to be fixed.	
F3	same as Fig. F2, except without Roundels.	