


DIAMETER OF ROUND EL 8³/₁₆"

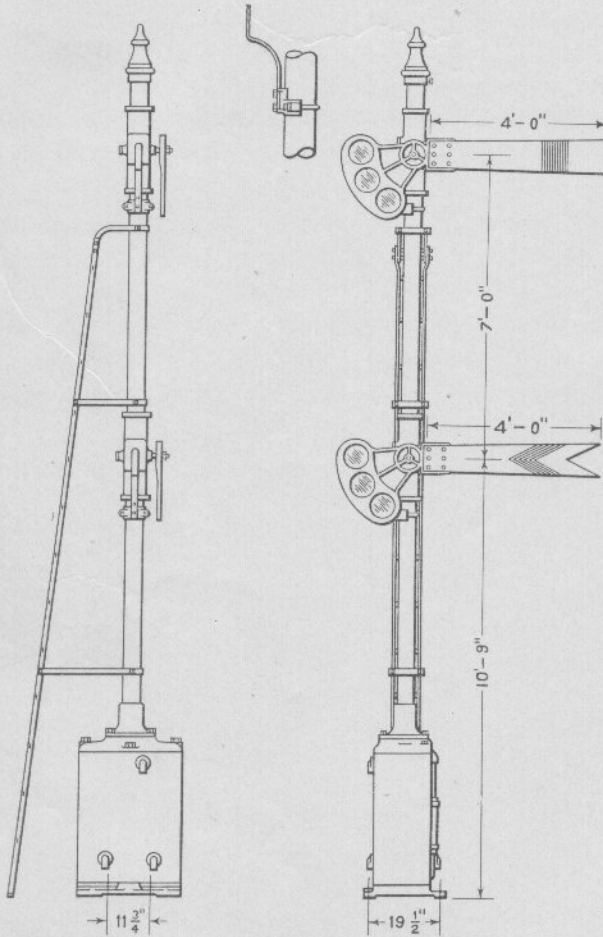

- A - WITH 8 VOLT MECHANISM
- B - WITH 10 VOLT MECHANISM
- C - WITH 20 VOLT MECHANISM

Two Arm Lower Quadrant Bracket or Bridge Signals

Two Arm

**Lower Quadrant Bracket or Bridge Signal
Model 2A Base of Mast Mechanism**

Unless otherwise specified, signal will be furnished as illustrated on opposite page. Lamps and number plate are not included. If signal other than that shown is desired, specify height to center of blades and give reference numbers to spectacle and blade; also state number and color of roundels. See Part 18 of this Section for spectacles, blades and roundels, and Part 17 for masts, ladders, bearings, etc. See Plate H0301 for dolis.

Circuit controller is equipped with the contacts necessary for the local control of the signal only. If pole changing contacts or extra drag contacts are required, same must be specified. State the positions of the signal blade at which each extra contact is to make and break, considering the stop position as 0 degree.

Drawing references are shown for convenience in checking shipping lists and invoices.

Fig. No.	Name	Drawing Reference
Order by plate, figure number and name		
A	Two Arm Lower Quadrant Model 2A Bracket or Bridge Signal with 8 volt Mechanism and Case, complete as shown. For details and specifications of Signal Mechanism see Plate H1103.	
A1	as above, except without Roundels.	
B	same as Fig. A, except with 10 volt Mechanism.	
B1	as above, except without Roundels.	
C	same as Fig. A, except with 20 volt Mechanism.	
C1	as above, except without Roundels.	