


UNION SWITCH & SIGNAL COMPANY

## Zachary C. Gillihan 2008

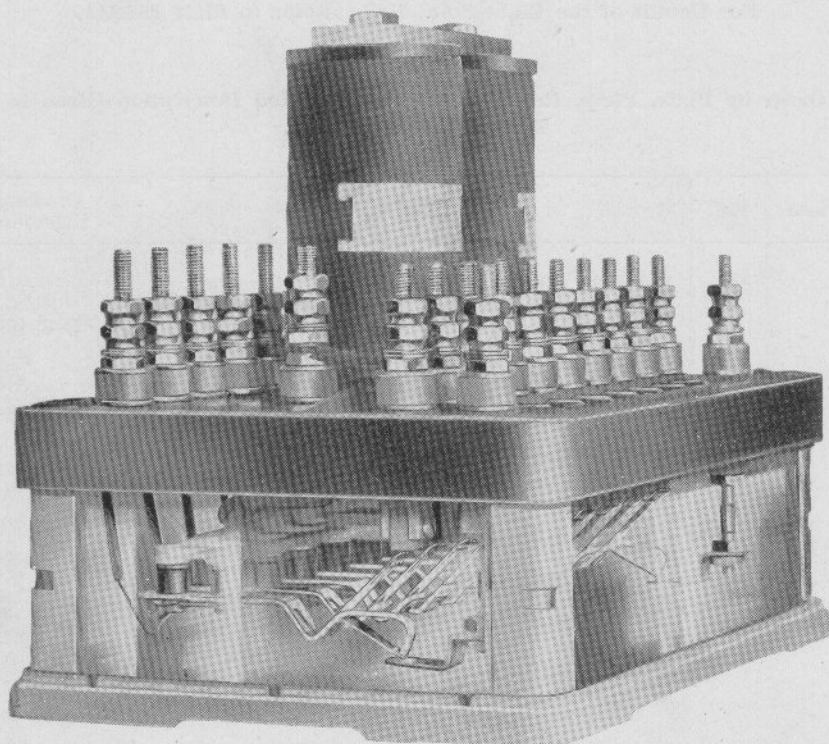

A

### MODEL 13 D. C. NEUTRAL RELAY (TEN-POINT)

Unless otherwise specified Relays will be furnished with silver to graphite front and silver to silver back contacts. (Low voltage contacts).

If high voltage contacts, or relays with slow or quick release are required, orders should so specify.

Shock absorber springs are not furnished unless called for. (See Plates E-4842 and E-5030).

The maximum contact combination is ten front and ten back non-independent contacts.

**Model 13 D. C. Neutral Relays  
(Ten-Point)**

For Details of the Ten-Point Relay Refer to Plate E-4842.

Order by Plate, Piece, Reference and Abbreviated  
Description Given in Heavy Face Type Only

Piece	Ref.	Description	Drawing Reference
	A	<b>Model 13 (Shelf Type) D. C. Relay, Magnets Ohms per Pair</b> , complete with ten front and two back low voltage non-independent contacts.....	C-8848-2
	Aa	<b>Model 13 (Shelf Type) D. C. Relay, Magnets Ohms per Pair</b> , complete with ten front and ten back low voltage non-independent contacts.....	C-8848-2

File Plates in Proper Sequence  
in Loose Leaf Covers