




ZCG UTILITY SCRAP UNION MO 63084

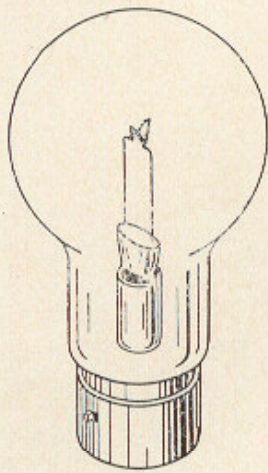


A

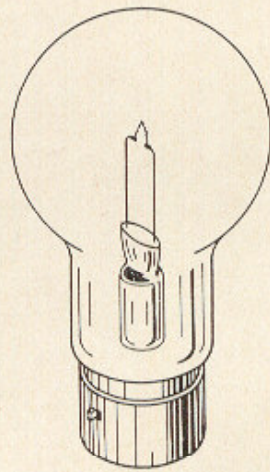


B

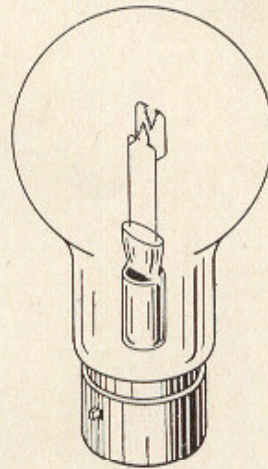


C

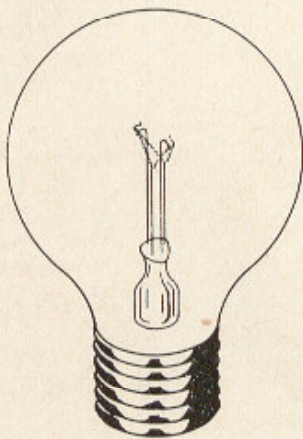


D

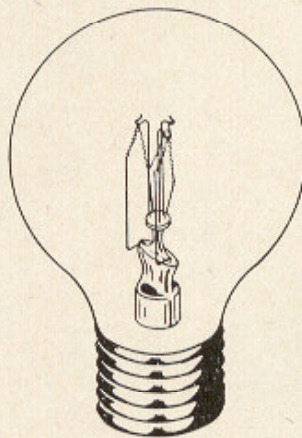


E

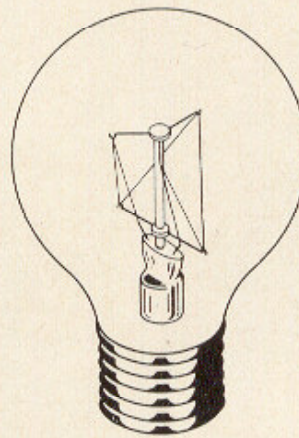


F




G



H



J



K

Lamp Bulbs for Color Light Signals

Lamp Bulbs for Color Light Signals

Special Rebased Lamps for Styles "R-2", "TR-2", "P-5", "TP-5", "N-2" and "N-3" Signals.

Screw Base Lamps for Style "N" Signals.

Bayonet Candelabra Base Lamps for Semaphore and Marker Lights, or with suitable adapter for use in any Signal.

Order by Plate, Piece, Reference and Abbreviated Description Given in Heavy Face Type Only

Lamp, Special Rebased Base, Double Filament.						
Piece	Ref.	Rating		Light Center Length	Rated Average Life in Hours	Drawing Reference
		Volts	Watts			
122995	A	8	10	$2\frac{7}{32}$ "	1000	B-12409-16
116447	Aa	10	18	$2\frac{7}{32}$ "	1500	B-12409-16
116449	Ab	10	30	$2\frac{7}{32}$ "	1500	B-12409-16
116451	Ac	10	40	$2\frac{7}{32}$ "	1500	B-12409-16
120620	Ad	30	36	$2\frac{7}{32}$ "	1500	B-12409-16
Lamp, Special Rebased Base, Single Filament.						
144539	B	8	10	$2\frac{7}{32}$ "	1000	B-12409-21
144541	Ba	8	18	$2\frac{7}{32}$ "	1500	B-12409-21
135247	Bb	10	10	$2\frac{7}{32}$ "	1500	B-12409-21
142944	Bc	10	18	$2\frac{7}{32}$ "	1500	B-12409-21
144543	Bd	10	30	$2\frac{7}{32}$ "	1500	B-12409-21
176936	Be	10	45	$2\frac{7}{32}$ "	3000	B-12409-21
144551	Bf	120	30	$2\frac{7}{32}$ "	1500	B-12409-21
Lamp, Special Rebased Base, Special Double Filament.						
189826	C	8	10+3.5	$2\frac{7}{32}$ "	1500 Main Fil. 19000 Sec. Fil.	B-12409-25
184972	Ca	8	18+3.5	$2\frac{7}{32}$ "	1500 Main Fil. 19000 Sec. Fil.	B-12409-25
184971	Cb	10	18+3.5	$2\frac{7}{32}$ "	1500 Main Fil. 19000 Sec. Fil.	B-12409-25
189825	Cc	10	30+6	$2\frac{7}{32}$ "	1500 Main Fil. 19000 Sec. Fil.	B-12409-25
Lamp, Screw Base, Semi-Concentrated Double Filament.						
112968	D	30	36	$2\frac{5}{16}$ "	1500	B-12409-6

Lamp Bulbs for Color Light Signals

(Continued) **ZCG UTILITY SCRAP**
UNION MO 63084

Order by Plate, Piece, Reference and Abbreviated
Description Given in Heavy Face Type Only

Lamp, Screw Base, Semi-Concentrated Single Filament.

Piece	Ref.	Rating		Light Center Length	Rated Average Life in Hours	Drawing Reference
		Volts	Watts			
95268	E	120	36	2 $\frac{3}{16}$ "	1500	B-12409-6

Lamp, Screw Base, Large Single Filament, Wide Angle, Very Short Range Indication.

68468	F	60	25	2 $\frac{3}{16}$ "	1000	B-12409-6
68467	Fa	115	25	2 $\frac{3}{16}$ "	1000	B-12409-6

Lamp, (S-11) Single Contact Bayonet Candelabra Base, Single Filament, $\frac{1}{64}$ " Signal Precision Basing.

136626	G	6	3	1 $\frac{1}{4}$ "	1000	B-12409-18
168741	Ga	8	5	1 $\frac{1}{4}$ "	1000	B-12409-18
142967	Gb	8	10	1 $\frac{1}{4}$ "	1000	B-12409-18
177731	Gc	8	18	1 $\frac{1}{4}$ "	1000	B-12409-24
148970	Gd	10	5	1 $\frac{1}{4}$ "	1000	B-12409-18
146930	Ge	10	10	1 $\frac{1}{4}$ "	1000	B-12409-18
151138	Gf	10	18	1 $\frac{1}{4}$ "	1000	B-12409-18
175067	Gg	10	25	1 $\frac{1}{4}$ "	1000	B-12409-18
145877	Gh	11	11	1 $\frac{1}{4}$ "	2500	B-12409-18

Lamp Bulbs for Color Light Signals

(Continued)

Order by Plate, Piece, Reference and Abbreviated
Description Given in Heavy Face Type Only

Lamp, (S-11) Single Contact Bayonet Candelabra Base, Special Double Filament, $\frac{1}{64}$ " Signal Precision Basing.						
Piece	Ref.	Rating		Light Center Length	Rated Average Life in Hours	Drawing Reference
		Volts	Watts			
192057	H	8	5+3.5	1 $\frac{1}{4}$ "	1000	B-12409-24
159440	Ha	8	13+3.5	1 $\frac{1}{4}$ "	1000	B-12409-24
199177	Hb	8	18+3.5	1 $\frac{1}{4}$ "	1000	B-12409-24
182814	Hc	10	13+3.5	1 $\frac{1}{4}$ "	1000	B-12409-24
191859	Hd	11.3	14.4+3.5	1 $\frac{1}{4}$ "	1000	B-12409-24
Piece	Ref.	Description				Drawing Reference
146283	J	Adapter (for use with S-11 Single Contact $\frac{1}{64}$ " Precision Lamps).....				12415-10
119806	K	Adapter (Screw to Bayonet) For use with S-11 Single Contact $\frac{1}{64}$ " Precision Lamps applied to Screw Base Socket.....				9954-57

ZCG UTILITY SCRAP
UNION MO 63084